

nifty

RT

ROUGH TERRAIN WORK PLATFORMS

45ft, 50ft & 61ft
Platform heights


Exceptional Outreach
31ft - 43ft Working outreach

45% Gradeability
4WD for rough terrain

Suspension System
Improved traction on
uneven terrain

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to use

**Platform Rotation
& Jib**
Improved access
to applications

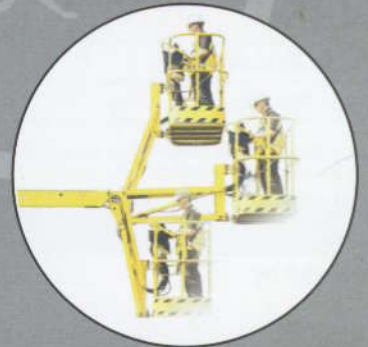


niftylift.com

nifty Rough Terrain

With platform heights ranging from 45ft to 63ft, Nifty's RT Booms all come with impressive outreach capabilities as well as a host of other features designed to maximize their performance over the roughest terrain. Their innovative designs combine weight and space saving technology with the latest advances in boom geometry to create truly versatile, robust machines that are simple to use, easy to maintain and very economical to transport.



Compact chassis design and excellent turning circles mean they are extremely maneuverable on-site and with powerful 4WD available along with a unique suspension system, they provide superb traction on steep or uneven surfaces.

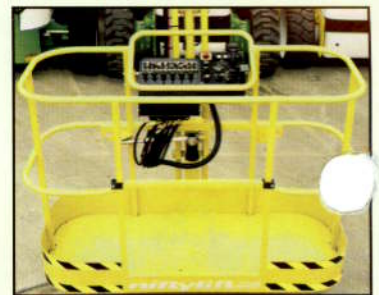

Fully proportional hydraulic controls deliver smooth and measured operation while platform rotation and a fly boom allow the operator to position the platform with precision, anywhere their vast working envelopes.

SPECIFICATIONS

	SP45 4x4	SP50 4x4	SP64 4x4
Working Height	51ft 8in	56ft 6in	67ft 9in
Platform Height	45ft 1in	49ft 10in	61ft 3in
Working Outreach	31ft 6in	31ft 6in	41ft 5in
Slew	360°	360°	360°
Flyboom Arc	150°	150°	150°
Width	6ft 7in	6ft 7in	7ft 5in
Height	6ft 11in	6ft 11in	7ft
Length - Stowed	15ft 8in	15ft 8in	16ft 5in
- Overall	19ft 8in	19ft 8in	20ft 6in
Minimum Weight	12,232lbs*	13,508lbs*	13,944lbs*
Turning Radius - Inside	5ft 2in	5ft 9in	2ft 7in
- Outside	13ft 3in	13ft 10in	13ft
Platform Rotation	100°	100°	100°
Platform Capacity	500lbs	500lbs	500lbs
Platform Size	5ft 11in x 2ft 4in	5ft 11in x 2ft 4in	5ft 11in x 2ft 4in
Drive Speed	4.1mph	4.1mph	4.1mph
Gradeability	45%	45%	45%
Control System	Fully Proportional Hydraulic	Fully Proportional Hydraulic	Fully Proportional Hydraulic
Power System	Kubota 1505 32Hp	Kubota 1505 32Hp	Kubota 1505 32Hp

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

*Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT INC

825 North Driveway,
Glen Ellyn IL, 60137-5726, USA
Tel.: 1-800-NIFTYLIFT
Tel.: 1-630-858-0822
Fax: 1-630-858-0520
e.mail: aerialift@aol.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax: +44 (0)1908 312733
e.mail: info@niftylift.com

www.niftylift.com